



TO3003 & SB3003

BRZ/GR86 LED Rear Bumper Lamp
Brake (Fog)/Reverse/Position Lights

Application: 2022+ SUBARU BRZ & TOYOTA GR86

Kits-

- Cover x1
- Switch x1
- Installation Displacement Connectors x2

Required Tool-

- 10 mm socket – short
- Lineman's pliers

SB3003



SB3002



TO2003







1. Open the trunk and unclip indicated hood. 2. To remove the 2 screws.



6. To remove the plug from car and take off clip from base of light.




3. To remove the tail light and disconnect plug.

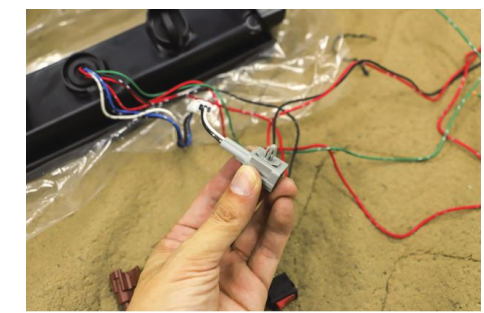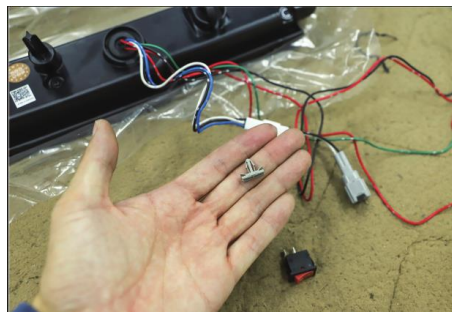


7. Put the clip to performance light.



4. To remove bolts are under the bumper (3)

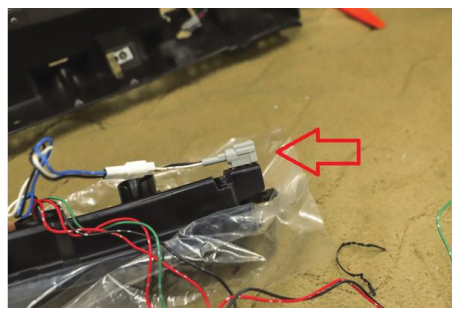


8. To fix connector on back of light.

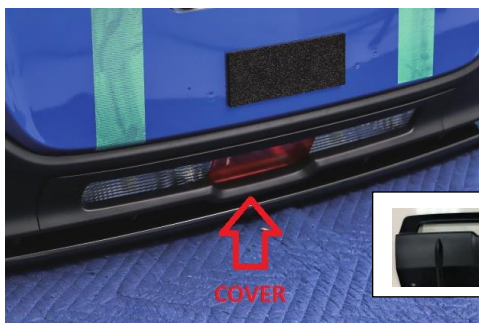

5. To remove the cover and light from rear bumper.

TO3003 BRZ/GR86 LED Rear Bumper Lamp

Brake (Fog)/Reverse/Position Lights

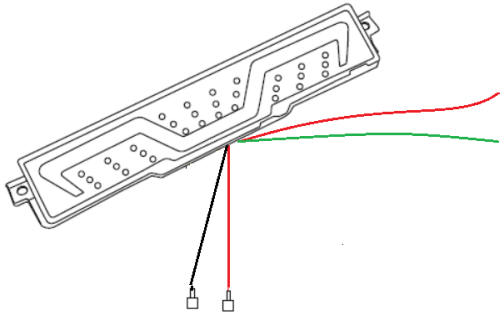



Red wire (Brake light signal)

Green wire (Position light signal)


Two ways to connect tail light signal:



1. For stock tail light: To tap into the Red wire for tail light brake light signal and the Green wire for tail light position light signal (please check tail light connector as below photos). Using the included vampire clamps, affix them to the wires, taking care to offset their locations for easier hook up.

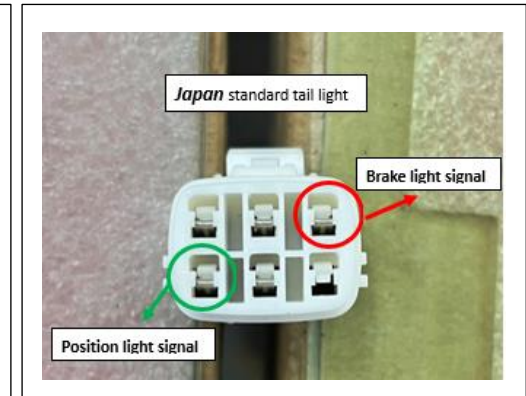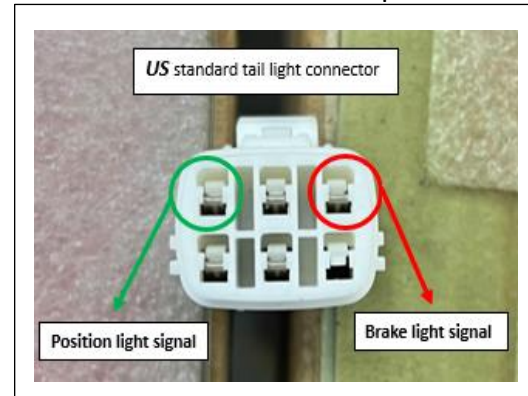

2. For new tail light: To tap into the Red wire for tail light Red light signal and the Green wire for tail light Green light signal. Using the included vampire clamps, affix them to the wires, taking care to offset their locations for easier hook up.

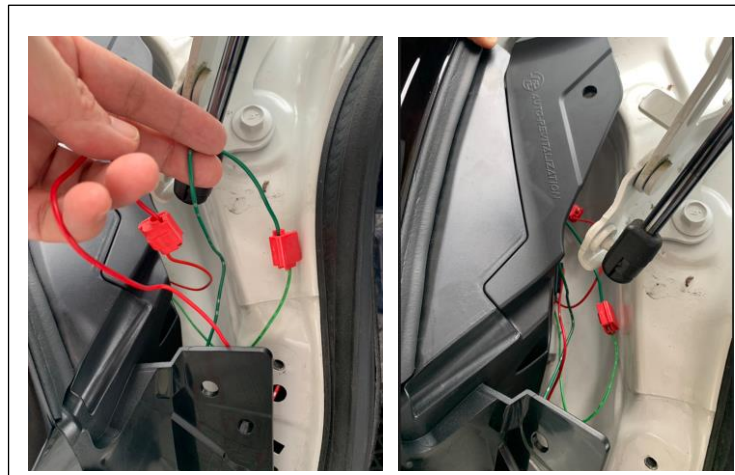

Red and Black wire with flat connector to plug in the switch.

Note: The switch to change brake light into F1 style or not. F1 style flash has 5 second delay between consecutive brake pedal actuations



