


本機為馬達直結驅動式，性能佳，佔地小，風量大且噪音低，葉片經沖壓成形，角度正確對氣流之安穩性優良，適用於小型場所之通風換氣等。

The fans are driven directly by the motors. Its press-processed blades are accurately shaped which allows great volume of air flow and very quiet in operation.

It is compact and well suited for confine areas.

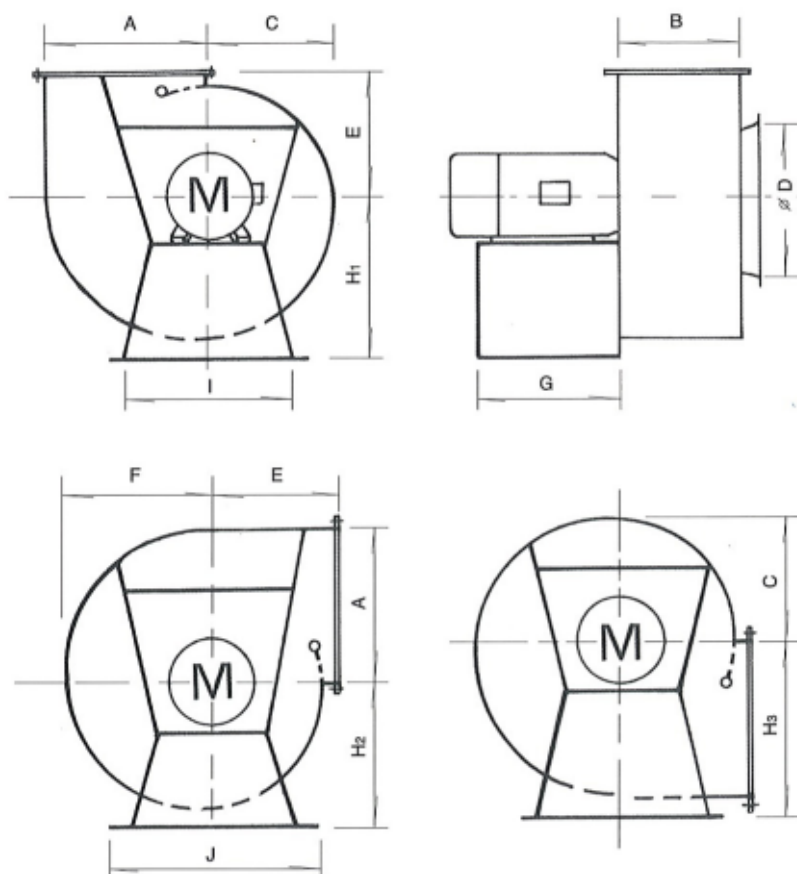

選擇及能量 Selections & Ratings

型 式 TYPE	馬 達		風 量 m ³ /min	靜 壓 mmAq	尺 寸 (Dimensions)mm											
	HP	RPM			A	B	C	φD	E	F	G	H ₁	H ₂	H ₃	I	J
SD-1½	½	1750	26	45	230	160	180	240	185	210	170	235	205	275	200	260
SD-1¾	½	1160	40	20	255	170	200	275	195	230	190	260	230	300	230	300
SD-1¾	1	1750	34	50	255	170	200	275	195	230	190	260	230	300	230	300
SD-1¾	2	1750	50	50	255	185	200	275	195	230	220	260	230	300	230	300
SD-2	2	1160	75	35	300	210	225	320	215	265	220	295	255	350	260	340
SD-2	3	1750	61	75	300	210	225	320	215	265	240	295	255	350	260	340
SD-2½	5	1750	100	90	380	250	280	380	275	330	250	370	320	440	330	410
SD-2½	7½	1750	110	105	380	300	280	380	275	330	280	370	320	440	330	410